

Versiclad

insulated panel solutions for
walls, ceilings and roofs



ceilings

versatile .. insulating .. quick & easy .. modular .. cost

after



before



after



before



CEILINK

Developed specifically to help you tolerate the extreme Australian heat, Ceilink was designed to insulate any new or existing single skin roof and provide a comfortable living environment. With it's easy to install joining system, the lightweight panels leave an attractive maintenance free non-reflective ceiling face with no visible fixings. Ceilink also dramatically reduces ceiling mould and condensation problems during winter.



Install Ceilink now and be comfortable all year round.

For use in domestic and commercial applications:

Patios
Awnings
Sheds

Pergolas
Sunrooms
Garages

Screen Enclosures
Factory Units
Commercial Kitchens

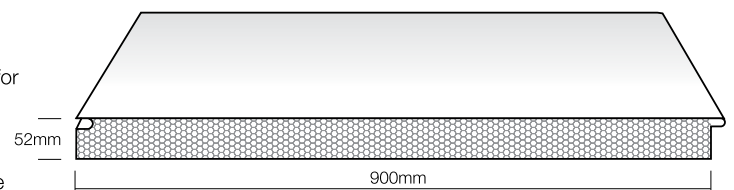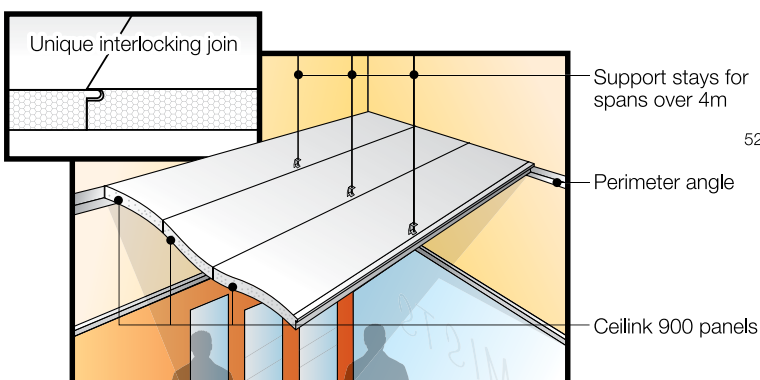

- Panel width 900mm
- Min. / Max. length 1800mm / >6000mm
- Max. unsupported length 4000mm
- Finish white embossed or smooth steel
- Interlocking tongue & groove on long edge
- Insulation R value up to 2.28m²/kw

roofing

effective .. strong .. durable .. low maintenance .. stylish


VERSALINK - SPACEMAKER - CORROLINK - DOUBLE CORROLINK - MULTIDEK

Thinking of a new roof? Need to insulate?


Look no further than Versiclad 3 in 1 insulated roofing for your domestic or commercial application. Lightweight and easy to install, our roof panels offer large trafficable spans and a clean interlocking ceiling face with no visible fixings. Our roofing products not only reduce the heat in summer, but help eliminate ceiling mould and condensation during winter. Versiclad roofing panels are a speciality product combining an exterior profiled roof skin, polystyrene insulation core, and a pre-finished maintenance free ceiling face. Whether your building a room, screen enclosure, pergola, site office or factory, our fully insulated roof panels will ensure your comfort all year round.




VERSALINK

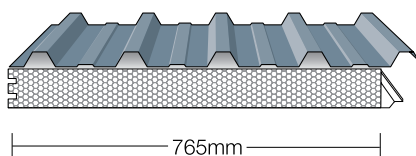


MULTIDEK

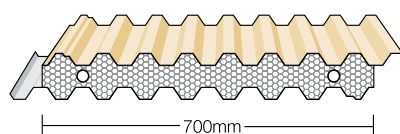


CORROLINK

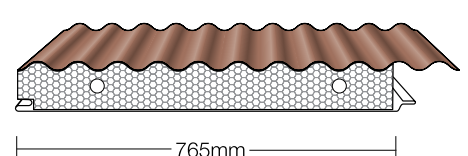

SPACEMAKER

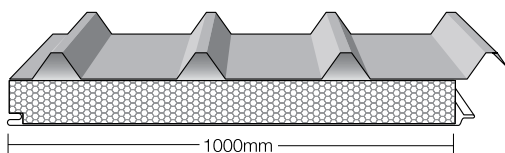

DOUBLE CORROLINK

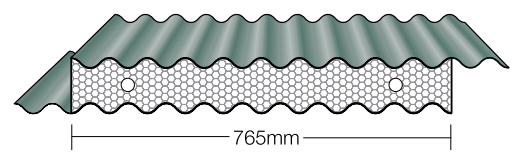

Roofing features:

- Pre-finished steel roof
- EPS insulated core
- Interlocking ceiling joints
- Various steel ceiling surface finishes
- Provisions for electrical wiring
- Lengths range from 1.2m to 13m
- Trafficable freespans up to 9m
- Various core thicknesses available.

walls

.. design flexibility .. diy .. long spans .. light weight ..




PANELINK

Panelink is a modular wall system designed to build caravan annexes, sun rooms, screen enclosures, hobby rooms, and factory offices. A variety of internal and external finishes, sliding windows and doors, provide the perfect solution in either 38mm, 50mm or 75mm thick panels. Aluminium extruded sections frame the systems making installation quick and easy. Panelink can also be used in conjunction with our Ceilink & insulated roofing products.

RENDAPANEL

Rendapanel utilises the Panelink framing systems and provides yet another option for finishing the inside and outside of your wall. Supplied with fibre cement both sides you have the choice to render finish or simply paint the panels to match your existing home.



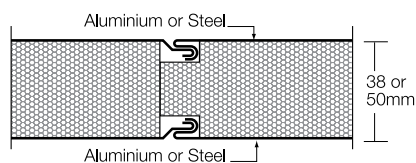


PANELINK

- Thickness: 38, 50 or 75mm
- Width: 1000 or 1200mm
- Lengths:
 - metal/metal: 2400 - 5000mm
 - metal/decorative ply: 2440 or 2743mm
 - dec. ply/dec. ply: 2440 or 2743mm

RENDAPANEL

- Thickness: 38, 50 or 75mm
- Width: 900 or 1200mm
- Lengths:
 - fibre cement both sides: 1800, 2400, 2700 or 3000mm

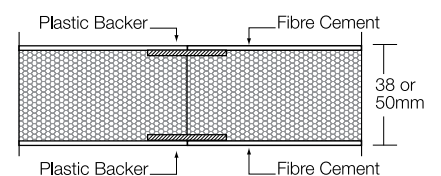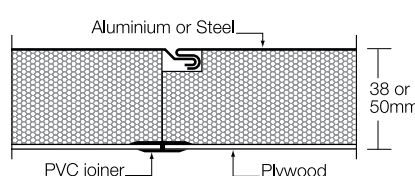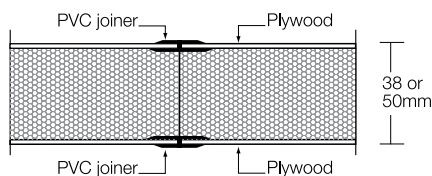

modular building panels

free standing rooms . . . home extensions . . . sunrooms




Panelink Walls Optional Configurations

Available in 38mm, 50mm, 75mm thicknesses. Alternate materials & sizes available on request.

OPTIONAL LININGS		EXTERIOR						
		Aluminium* 1200mm Width	Steel* 1200mm Width	Steel* 1000mm Width	FC 4.5mm SE 900mm or 1200mm Width	FC 6.0mm SE or RE 1200mm Width	3.6mm Exterior Ply 1200mm Width	6.0mm OSB 1200mm Width
INTERIOR	Aluminium* 1200mm Width	2400, 2700, 3000, 3300	2400, 2700, 3000, 3300	N/A	(1200mm only) 2400, 2700, 3000	2400, 2700	2440	2440, 2743
	Steel* 1200mm Width	2400, 2700, 3000, 3300	2400, 2700, 3000, 3300	N/A	(1200mm only) 2400, 2700, 3000	2400, 2700	2440	2440, 2743
	Steel* 1000mm Width	N/A	N/A	2400, 2700, 3000, 3300	N/A	N/A	N/A	N/A
	FC 4.5mm SE 900mm or 1200mm Width	(1200mm only) 2400, 2700, 3000	(1200mm only) 2400, 2700, 3000	N/A	1800, 2400, 2700, 3000	(1200mm only) 2400, 2700	N/A	N/A
	FC 6.0mm SE or RE 1200mm Width	2400, 2700	2400, 2700	N/A	N/A	2400, 2700	N/A	N/A
	3.6mm Raw Ply 1200mm Width	2440	2440	N/A	N/A	N/A	2440	2440
	10mm Gyprock 1200mm Width	2400, 2700	2400, 2700	N/A	(1200mm only) 2400, 2700	2400, 2700	N/A	N/A
	Vinyl Steel* 1000mm Width	N/A	N/A	2400, 2700, 3000, 3300	N/A	N/A	N/A	N/A
	Vinyl Ply 1200mm Width	2440, 2743	2440, 2743	N/A	N/A	N/A	2440	2440, 2743
	Elm Ply 1200mm Width	2440, 2743	2440, 2743	N/A	N/A	N/A	2440	2440, 2743
	Decorative Ply 1200mm Width	2440	2440	N/A	N/A	N/A	2440	2440

* Self mating joint system

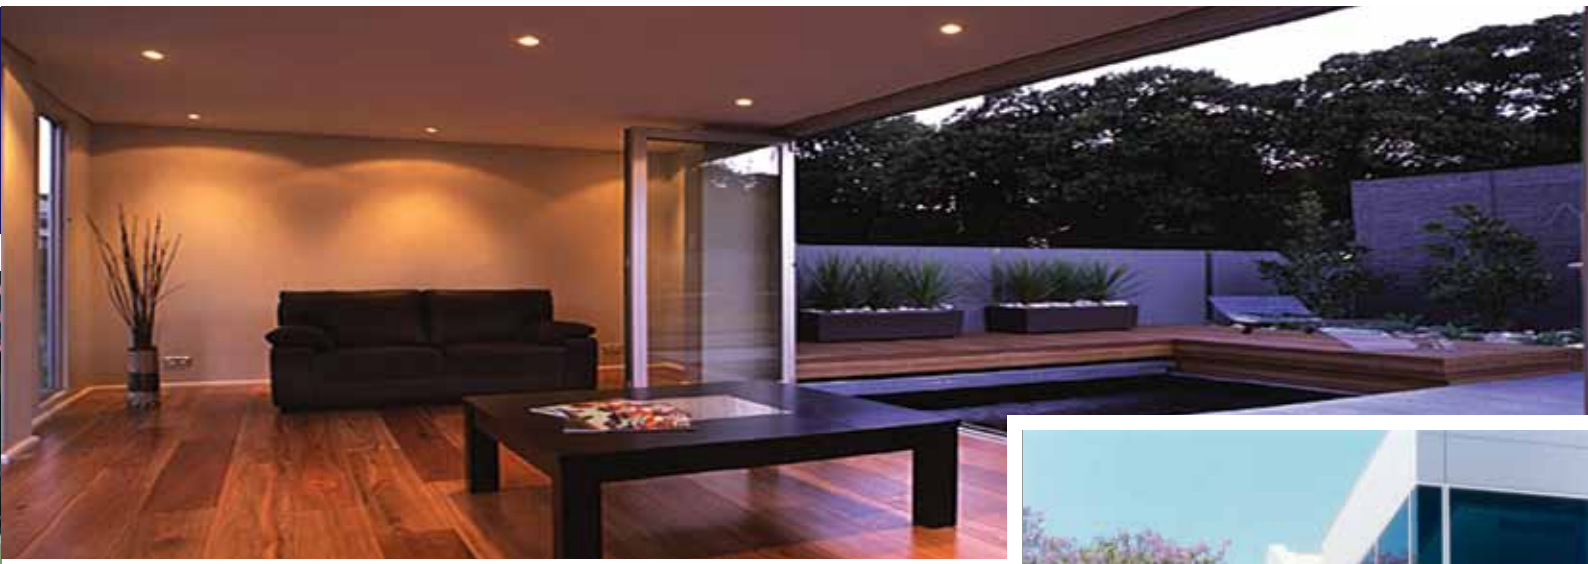

PANEL INNOVATION

Residential and commercial usage of Versiclad insulated panels range from a simple insulated ceiling through to the cladding of the Rod Laver Arena. Whether you're a professional builder, an architect, or want to do it yourself, our products are easy to install, versatile and fully guaranteed.

free standing rooms .. home extensions .. screen enclosures .. patios .. pergolas .. awnings .. sheds .. garages .. factory offices .. wine cellars .. caravan annexes

Versiclad

27 Helles Avenue Moorebank NSW 2170

tel: 02 9821 2199

fax: 02 9601 1152

email: info@versiclad.com.au

web: www.versiclad.com.au

Local Distributor